



Daylight Control Sensors Case Styles C, R & L

The cadmium sulfide (CdS) cell is hermetically sealed in a metal to glass case and further protected by epoxy resin in a molded plastic housing. Three standard types are available for applications requiring "turn off" and "turn on" resistance

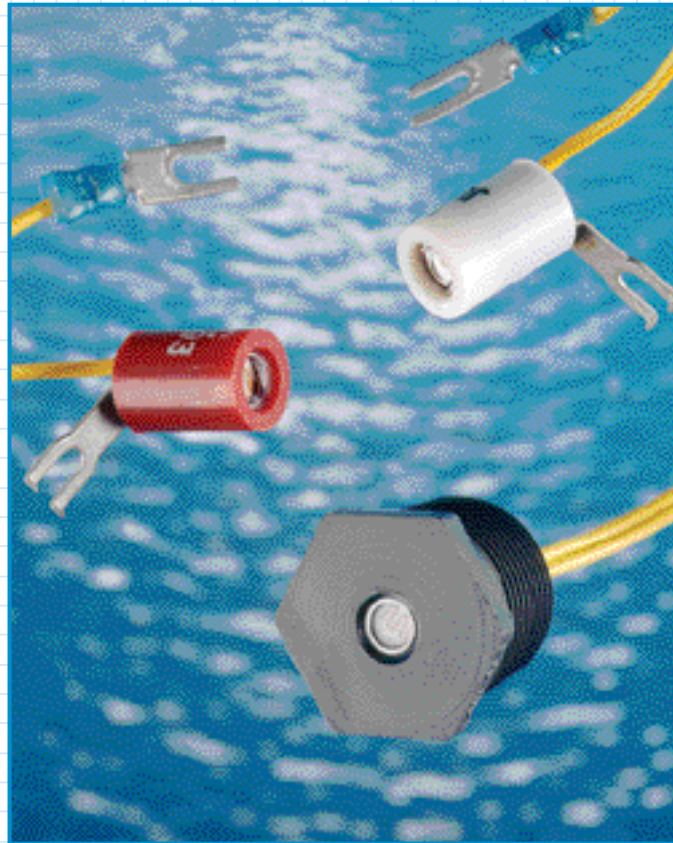

values between 10k and 40k ohms. The sensor must be mounted with light-sensitive area facing ambient illumination. These sensors meet the requirements of U.S. Coast Guard specification number 234.

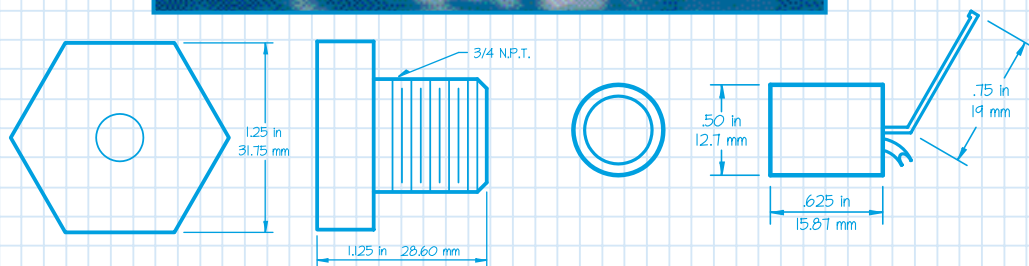

Sensor Type	C	R	L
Housing Color	White	Red	Gray
Resistance 2ft-c 1 (ohms)	129.0k	49.0k	129.0k
Resistance 40ft-c 1 (ohms)	10.8k	4.1k	10.8k
Mounting	Inside Lens	Inside Lens	Outside Lens
Lens Color	Clear	Red or Green	

"Light Waves To The World"